



har-port USB coupler

Advantages

- Compact and well-shaped service interface in a timeless attractive design
- Easy mounting
- Compact and robust design
- Practical accessories


Technical characteristics

Number of ports	2x USB Typ A
Mounting	Screwable in cover plates
Degree of protection	IP 20
Mating cycles	min. 1500
Temperature range	-25 °C ... +70 °C
Housing material	Polyamide

Identification	Part No.	Drawing	Dimensions in mm
----------------	----------	---------	------------------


har-port USB 2.0 A-A coupler

09 45 452 1901

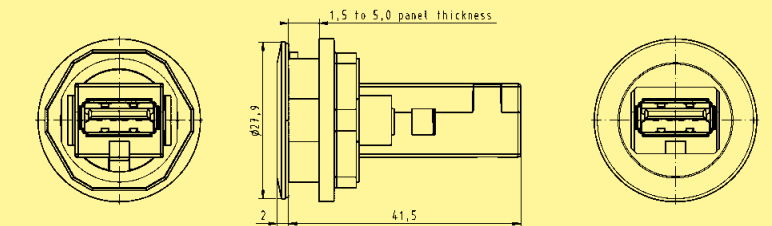


har-port USB 3.0 A-A coupler

09 45 452 1902

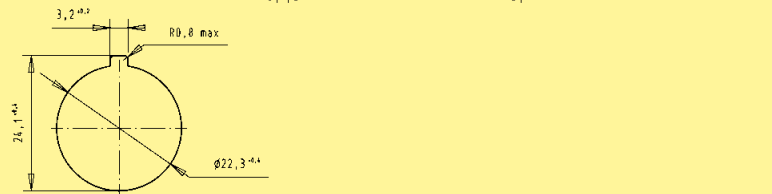

har-port USB 2.0 A-A coupler with cable

Length: 0.5 m	09 45 452 1920
1.0 m	09 45 452 1921
1.5 m	09 45 452 1922
2.0 m	09 45 452 1923
3.0 m	09 45 452 1924
5.0 m	09 45 452 1925

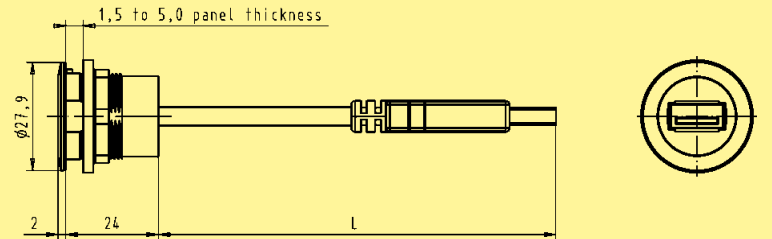

har-port USB 2.0 B-B coupler with cable

Length: 0.5 m	09 45 452 1910
1.0 m	09 45 452 1911
1.5 m	09 45 452 1912
2.0 m	09 45 452 1913
3.0 m	09 45 452 1914
5.0 m	09 45 452 1915

